



**WELD
SYSTEMS
INTEGRATORS, INC.**

RESISTANCE WELDING. SOLVED.



UNITROL

**SOFT
TOUCH**

**PINCH
POINT
SAFETY
SYSTEM**

Available from WSI as a retrofit to existing machinery by our experienced service team, as well as on new machines.

Easier Setup: No User Calibration, EVER. Just install and turn power ON.

Universal: Works with Non-Unitrol MFDC inverter and 1 Phase AC controls. Change two plug-in relays for use with 115VAC or 24VDC solenoid valve voltage.

Always Ready to Protect: Does not have to be calibrated even when you power-up, change material or change tooling.

Instantly Tunes to YOUR Welder: Does not stop production to recalibrate. Automatically compensates for changes in transformer tap switch position or line voltage shifts.

Easy to Read Operation Display: Shows exactly what is happening. Can be mounted on either side of enclosure.

Supports SOFT TOUCH RETRACT: Just add optional RETRACT pneumatic system with HEAD DOWN limit switch for full protection.

Full electrical redundancy: All inputs and outputs require closure of both electro-mechanical and solid-state redundant components for full safe operation. Self-monitors output relay to prevent any operation if a fault is detected.

As Always, The UNITROL SOFT TOUCH:

Cannot Be Bypassed

Sensor Wires Always Clear of Production Area: Sensor wires are connected at output of welder secondary. Never needs sensor wire location to be moved closer to the electrodes for any type of welder.


Fast Release: Electrodes close under low force and release in less than half of a second if metal is not detected between electrodes.

Electrodes Close Without Initial Delay: Electrodes start to move at the same time the welding control is initiated. Closing speed is independent of welding pressure.


Works with Ram Depth Limit Switch: For redundant system requiring both Electrode Continuity and Ram Depth Limit Switch closure.

HOW SOFT TOUCH WORKS

SEQUENCE: When the foot or hand switch is closed to start a weld:




1. The welding electrodes close under low force. The unique pneumatic systems designed by UNITROL for this process can counter-balance the weight of the ram on large press welders. Even where the dead-weight of the welder ram is hundreds of pounds, the electrode force produced will be 50 pounds or less.



3. If metal is not detected, the electrodes open automatically and do not go to welding force. A display tells the operator the problem.



2. The welding control checks to see if metal has been detected between the electrodes within a customer set maximum time limit.



4. If metal is detected, full welding force is applied and the weld proceeds normally


SOFT TOUCH is a Fully Passive Fail-Safe System

TYPES OF WELDERS: SOFT TOUCH can be used with all types of metals on press welders, rocker-arm welders, portable gun welders, and hanging gun welders doing spot, projection and seam welding.


FULLY PASSIVE: There are no operator adjustments. Even if electrode height or travel is changed, the SOFT TOUCH system continues to function without any operator changes. In fact, there is nothing for the operator to adjust.

FAIL SAFE OPERATION: If any of the system sensor wires become disconnected, the SOFT TOUCH system will lock out and not let the electrodes close or the welding sequence to proceed.

If the SOFT TOUCH sensor board detects electrode continuity before the foot switch or hand switches are closed, the system will lock out and not allow any electrode movement.

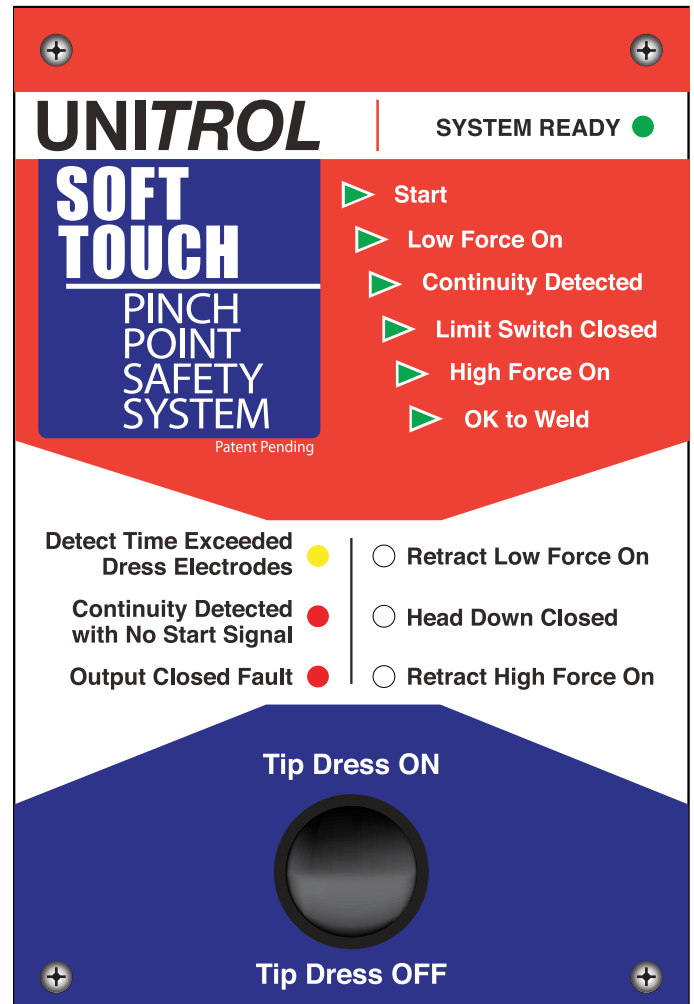

OSHA AND ANSI RESEARCH FOR SOFT TOUCH CONCEPT



Soft Touch remains safe even during electrode installation and dressing.
A Tip Dress switch is included for use during these procedures.

ANSI 12.3.2.2 Single-Ram and Single-Point Equipment.

On stationary single-ram welding machines, unless the workpiece size, configuration, or tooling (e.g., jig or fixture) occupies both of the operator's hands remotely from the point of operation during the machine cycle, operations shall be in a manner preventing injury to the operator by one or a combination of the following:

(1) Machine guards or fixtures preventing the operator's hands from passing under the point of operation; (2) Two-handed controls; (3) Latches; (4) Presence sensing devices; or (5) Any similar device or mechanism preventing operation of the ram while the operator's hands are under the point of operation.

NOTE: SOFT TOUCH matches (5) by preventing dangerous operation of the welder ram (closing of electrodes) while the operator's hands are between the electrodes.

OSHA 1910.212(a)(1)

Types of guarding. One or more methods of machine guarding shall be provided to protect the operator and other employees in the machine area from hazards such as those created by point of operation, ingoing nip points, rotating parts, flying chips and sparks. Examples of guarding methods are barrier guards, two-hand tripping devices, electronic safety devices, etc.

NOTE: The SOFT TOUCH sensor board is an "electronic safety device" in that it closes an electromechanical relay when it electronically senses that the electrodes are closed on the metal part in the work area prior to application of high force.

OSHA 1910.255(b)(4) (resistance welding machines)

Guarding. All press welding machine operations, where there is a possibility of the operator's fingers being under the point of operation, shall be effectively guarded by the use of a device such as an electronic eye safety circuit, two hand controls or protection similar to that prescribed for punch press operation, 1910.217.

NOTE: The following sections of OSHA 1910.217 are all that were recommended for this application:

OSHA 1910.217(c)(3)(iii)

A presence sensing point of operation device shall protect the operator as provided in paragraph (c)(3)(i)(a) of this section, and shall be interlocked into the control circuit to prevent or stop slide motion if the operator's hand or other part of his body is within the sensing field of the device during the downstroke of the press slide.

NOTE: The electrode on the low-force ram becomes the "sensor" in this system. The "downstroke" of the welder, with the SOFT TOUCH system installed, starts when high pressure is applied to the welder ram.

OSHA 1910.217(c)(3)(iii)(b)

The device may not be used as a tripping means to initiate slide motion.

NOTE: This SOFT TOUCH circuitry does not initiate any valves. It is only an input into the weld control to indicate part (finger) sensed in between the electrodes.

OSHA 1910.217(c)(3)(iii)(c)

The device shall be constructed so that a failure within the system does not prevent the normal stopping action from being applied to the press when required, but does prevent the initiation of a successive stroke until the failure is corrected. The failure shall be indicated by the system.

NOTE: At the start of each stroke, SOFT TOUCH checks to see if the sensing system is closed. If it is, the sensor stroke is never started, and the control's display shows the fault. The sensor must be opened before any other action is possible on the welder.

TYPES OF WELDERS: SOFT TOUCH can be used with all types of metals on press welders, rocker arm welders, portable gun welders, and hanging gun welders doing spot, projection and seam welding.

SELECT A MODEL TO MATCH YOUR WELDER:

Heavy Weight Ram: Press Welders with force between electrodes over 50 pounds when all air is removed from the welder (dead weight measurement).

Light Weight Ram: Press Welders with force between electrodes 50 pounds or less when all air is removed from the welder, Rocker Arm Welders, Portable Gun Welders*, Intensifier Cylinder Welders, and Hanging Gun Welders.

AVAILABLE MODELS: Supplied with 3/4" solenoid valves for use with 2" – 8" diameter welder cylinders.

Model	Electrical Welder Type	Mechanical Welder Type	Solenoid Voltage
9181-34WB/115	1Ø AC	Heavy Weight Ram	115VAC
9181-34YB/115		Light Weight Ram	
9181-34WB/24DC		Heavy Weight Ram	24VDC
9181-34YB/24DC		Light Weight Ram	
9181-34WM/115	MFDC (inverter)	Heavy Weight Ram	115VAC
9181-34YM/115		Light Weight Ram	
9181-34WM/24DC		Heavy Weight Ram	24VDC
9181-34YM/24DC		Light Weight Ram	

*Consult the sales department at WSI for additional requirements for PORTABLE GUN (Transgun) Welders.

For welders with air cylinders over 8" diameter, add the number **1** just before the / in any model number.

For example, 9181-34WB**1**/115. The SOFT TOUCH systems will be supplied with 1" solenoid valves.

For welders with air cylinders less than 2" diameter, add the letter **S** just before the / in any model number.

For example, 9181-34WBS/115. The SOFT TOUCH systems will be supplied with 3/8" solenoid valves.

OPTIONS: All options shown (right) can be ordered with the SOFT TOUCH system or can be easily added later in the field without modification of the control.

BYPASS SWITCH

Model 9181-34BPA: Used for welding materials that have high resistance coatings such as titanium oxide.

Includes a two-position keylock switch with two indicator lights and faceplate. When in BYPASS position, electrodes close under low force and then switch to high force after a selectable time delay.

RETRACT KIT

Model 9181-34JA: Protects against pinch point injury when RETRACT brings the electrodes down to the "work" position. Will not allow closing of the electrodes for a weld until the HEAD-DOWN limit switch is closed. Does not go to full RETRACT force until after continuity is detected in the first weld, and then stays at full RETRACT force until the RETRACT switch is opened. Includes solidstate HEAD-DOWN proximity switch, mounting bracket and cam bracket.

LIMIT SWITCH

Model 9181-34LSA: Used when redundant system is required. Electrodes will not go to full welding force until both continuity between electrodes and closing of the ram limit switch. Includes a solid-state RAM POSITION proximity switch, mounting bracket and cam bracket.

PRESSURE REGULATOR KITS

Model 9181-34FRL-1/2: 1/2" NPT

Model 9181-34FRL-3/4: 3/4" NPT

Model 9181-34FRL-1: 1" NPT

Replaces existing pressure regulator, airline filter, airline lubricator and pressure gauge. This option is not required if the existing pressure regulator system is good condition.



4943 Driscoll Road
Warrensville Heights, OH 44146 USA

Main: 844-WSI-WELD

www.WSIweld.com • sales@WSIweld.com

International: +1-216-475-5629

DISTRIBUTED BY:



30001-E-02-18-05